

W-VACⁱ

for safety, reliability and performance



EATON

Powering Business Worldwide



Automotive



Aerospace



Truck



Hydraulics



Electrical

Powering business worldwide

Eaton delivers the power inside hundreds of products that are answering the demands of today's fast changing world.

We help our customers worldwide manage the power they need for buildings, aircraft, trucks, cars, machinery and entire businesses. And we do it in a way that consumes fewer resources.

Next generation transportation

Eaton is driving the development of new technologies – from hybrid drivetrains and emission control systems to advanced engine components – that reduce fuel consumption and emissions in trucks and cars.

Higher expectations


We continue to expand our aerospace solutions and services to meet the needs of new aviation platforms, including the high-flying light jet and very light jet markets.

Building on our strengths

Our hydraulics business combines localized service and support with an innovative portfolio of fluid power solutions to answer the needs of global infrastructure projects, including locks, canals and dams.

Powering Greener Buildings and Businesses

Eaton's Electrical Group is a leading provider of power quality, distribution and control solutions that increase energy efficiency and improve power quality, safety and reliability. Our solutions offer a growing portfolio of "green" products and services, such as energy audits and real-time energy consumption monitoring. Eaton's Uninterruptible Power Supplies (UPS), variable-speed drives and lighting controls help conserve energy and increase efficiency.

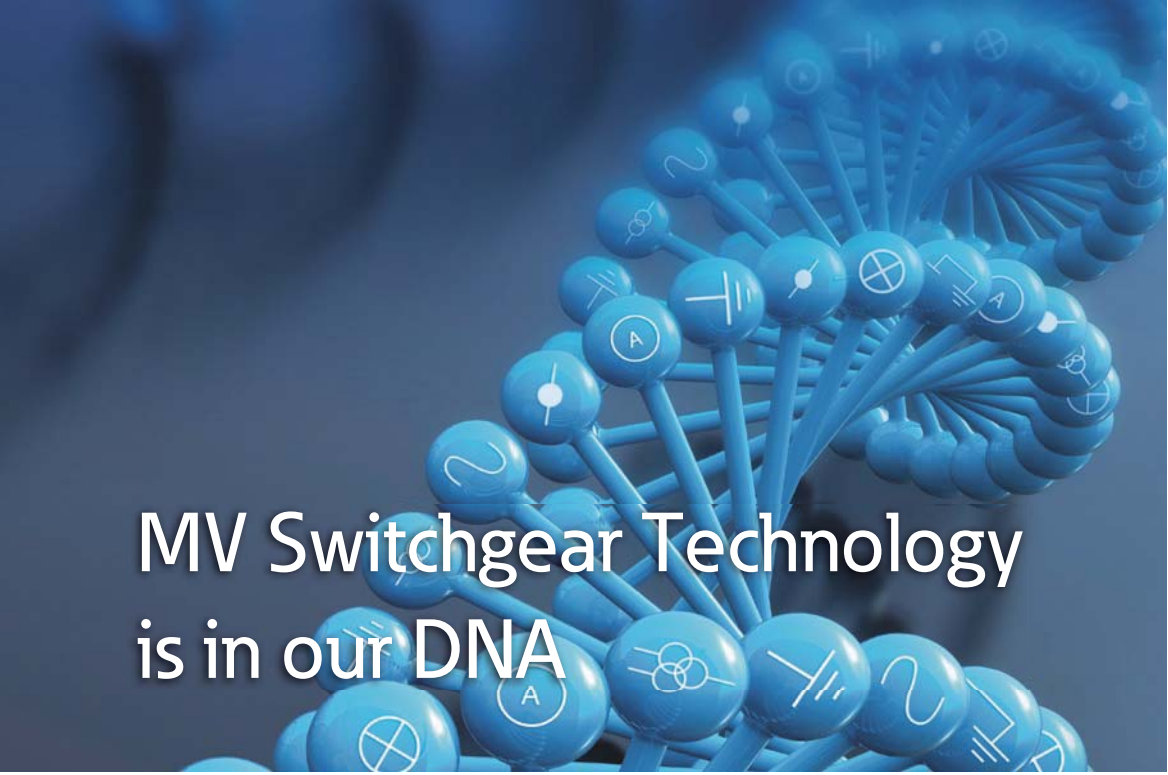

MV Switchgear Technology is in our DNA

Eaton Corporation is a worldwide leader in the design, manufacture, and sale of safe, reliable and high-performance medium voltage power distribution equipment in accordance with IEC, GB and ANSI standards.

Complete Global Medium Voltage Switchgear Solutions


Eaton, a premier leader in designing and manufacturing power distribution and protection equipment in the electrical industry, offers a comprehensive range of medium voltage (MV) solutions to meet the needs of virtually every application. From products that feature cutting-edge design that allow for easy access, maintenance and space savings, to arc-resistant products that enhance safety, Eaton's medium voltage solutions provide a variety of products for every need. Additionally, Eaton's global service network provides maximum customer support in all regions of the world.

As one of the few completely vertically integrated and diversified industrial manufacturers in the world, Eaton designs not only MV assemblies, but also the key components that comprise the MV solutions – from steel housing and circuit breaker compartments to vacuum interrupters, circuit breakers, bus systems and fuses.

Eaton's MV heritage, strengthened by acquisitions such as Westinghouse DCBU, Cutler Hammer, MEM and Holec, has resulted in breakthrough MV technologies and numerous international patents over the years.

Integral to Eaton's complete electrical PowerChain Solutions – which help businesses increase reliability, efficiency and safety – Eaton's medium voltage equipment meets all applicable standards and certifications such as IEC, NEMA / ANSI, GB, UL, IEEE, KEMA and CSA.

When it comes to medium voltage solutions, you can trust the one name with a long history of proven performance: Eaton.

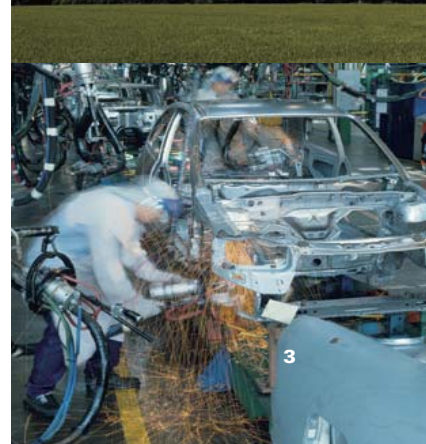

W-VACi IEC 24 kV

Reliability, safety and performance in a compact package

The new and extensive line of W-VACi compact MV vacuum circuit breakers with IEC ratings of 24 kV are part of Eaton's comprehensive global product portfolio. It serves both 50 Hz and 60 Hz end-user segments of the electrical industry such as industrial, commercial, utility, mining, marine and off-shore.

The W-VACi circuit breakers are complemented by a full line of accessories and compartment kits for panel builders. In addition, they fit in Eaton's new IEC panel design, Power Xpert® UX. UX is available in 800 mm and 1000 mm configurations.



W-VACi vacuum circuit breakers provide you with:

Industry leading vacuum and solid insulation technology

Through more than eighty years of innovation and experience, Eaton has developed environmentally friendly vacuum interrupters capable of reliably switching both normal load currents and high stress fault currents. In an effort to increase the dielectric strength of the vacuum interrupter, Eaton has also designed vacuum interrupters that are encapsulated in epoxy resin material. The W-VACi IEC circuit breaker family utilizes this solid insulation technology that has been catering to a wide range of applications for years.

Environmentally friendly design

Eaton's vacuum and solid insulation technology is free of SF₆-gas that contributes significantly to the greenhouse effect and associated climate change.

Conformance to the latest IEC standards

W-VACi IEC circuit breakers are designed and third party tested to the latest IEC 62271-100 and IEC 62271-1 standards. All W-VACi circuit breakers meet or exceed the electrical and mechanical endurance requirements of E2 and M2 in accordance with IEC 62271-100.

Reliability, safety, and performance

The W-VACi IEC circuit breakers offer numerous safety features for maximum protection. Eaton's extensive innovation and experience in the electrical industry deliver world-class product reliability and quality. Each W-VACi circuit breaker is tested mechanically and electrically before it leaves the ISO 9001 certified factory. W-VACi circuit breakers are compact, user-friendly and cost effective.

Versatility and flexibility

W-VACi circuit breakers can be used in an extensive scope of applications such as the protection of transformers, capacitor banks, motors, busbar sections and cables. The circuit breakers can be used in special environment conditions such as high altitude, light shock, vibration and high ambient temperature.



An Eaton Green Solution

Power Xpert® UX with W-VACi

W-VACi IEC 24 kV

Building Blocks

The W-VACi IEC 24kV circuit breakers are comprised of three key building blocks: vacuum interrupter (VI), epoxy resin encapsulated pole unit (EPU), and E-Legend mechanism assembly (ELMA). Each building block offers a set of specific benefits to construct a circuit breaker assembly of extreme safety, reliability and performance.



Vacuum interrupter (VI)

+



Encapsulated pole unit (EPU)

+




E-Legend mechanism assembly (ELMA)




Vacuum interrupter (VI)

At the heart of the W-VACi IEC circuit breaker portfolio is Eaton's proven vacuum interruption technology and eighty-year expertise in this field.

The vacuum interrupter is where current making and breaking occurs. It houses Eaton-designed high-performance copper-chrome contacts, which provide superior performance characteristics. The vacuum in the arc chamber protects the copper contacts from adverse effects such as contamination and corrosion.

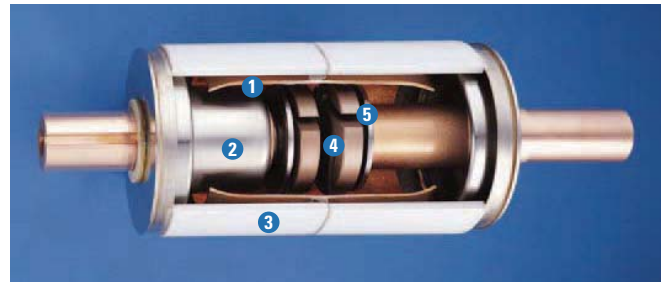

- Controlled contact erosion results in long life and maintenance-free operation
- Hard contact material minimizes contact sticking in a vacuum and is ideal for high-current applications
- Atmospheric contact contamination is eliminated because oxides and corrosion layers cannot form on the contacts
- Noise and flash free: All arcing is confined in the vacuum interrupter



- Environmentally friendly: Unlike other solutions that use SF6 (a highly hazardous gas) for insulation, Eaton's vacuum interrupters feature current interruption that occurs in a vacuum and does not emit greenhouse or toxic gasses

- Low average chopping current results in a minimal induced transient voltage spike; therefore, suppressors are often not required
- Vacuum dielectric permits contacts to be arranged closer together, allowing circuit interruptions to be designed in a smaller envelope
- Solid insulation increases external dielectric performance

- 1 Main Shield
- 2 Bellows shield
- 3 Ceramic insulators
- 4 Movable contact
- 5 Fixed contact

Encapsulated pole unit (EPU)

The W-VACi IEC vacuum circuit breakers use Eaton vacuum interrupters that are embedded in epoxy resin. This assembly is referred to as an encapsulated pole unit (EPU).

Durable

Encapsulating the vacuum interrupter in epoxy resin results in circuit breaker pole units that are extremely durable. Further, it protects the vacuum interrupter from mechanical impact and climatic conditions such as moisture, humidity and dust. The material is vibration and shock proof and its durability is long lasting.

High performance


Originally developed for outdoor use, the robust epoxy resin insulating material offers;

- Optimum thermal conductivity
- High electrical resistivity
- Low moisture absorption
- High creepage current resistance
- High mechanical strength
- Complete homogeneity

Eaton encapsulated pole units are designed in such a way that no partial discharging occurs on the surface.

Compact

Due to its mechanical strength, epoxy resin lends itself to a very compact design, when combined with Eaton’s world leading vacuum interrupter technology. High current and interruption ratings are achieved in a small package, generating cost savings for users.

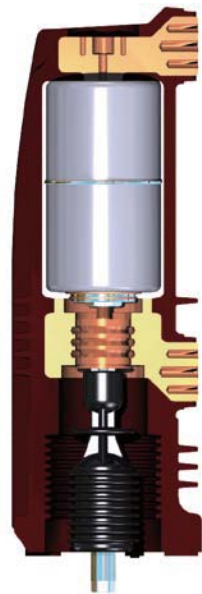

Encapsulated pole unit (EPU)

E-Legend mechanism assembly (ELMA)

Designed with reliability and long product life, the W-VACi circuit breaker utilizes a simple spring charged, stored energy mechanism. It is compact and has a limited number of moving parts.

Integrated modular design

Eaton’s E-Legend mechanism assembly (ELMA) is a modular design that is common across all 24kV W-VACi circuit breaker frames, making the W-VACi circuit breaker family easy to work with. Customers see no variation between different W-VACi frames, simplifying training, operation and inspection of the circuit breakers. ELMA is a self contained functional unit and allows for fast and easy installation. It is manufactured in large quantities and is not sensitive to process variations.

Eaton’s ELMA design requires low energy to operate motor close and trip through the use of special electronic components. All mechanism assembly plating is Restriction of Hazardous Substances (RoHS) compliant, offering an environmentally friendly solution.

Minimal inspection

Due to its modular design, material selection and limited number of moving parts, Eaton’s mechanism assembly requires minimal inspection.


The simplicity of the design reduces the energy required to operate it, minimizing system wear and the need for inspection.

Long life and reliability

With its simple and proven design, the EL mechanism assembly has a life of up to 20,000 mechanical operations and does not require inspection up to 10,000 operating cycles. It includes special plating on metal components to increase mechanical life and prevent corrosion.

Easy to use

To achieve smooth operation, Eaton’s mechanism assembly comes with an anti-pump relay as standard. It utilizes simple and clear circuit breaker status indication and requires low manual operation force. ELMA has an integrated manual charging handle. It is light and quiet for maximum ease of use.

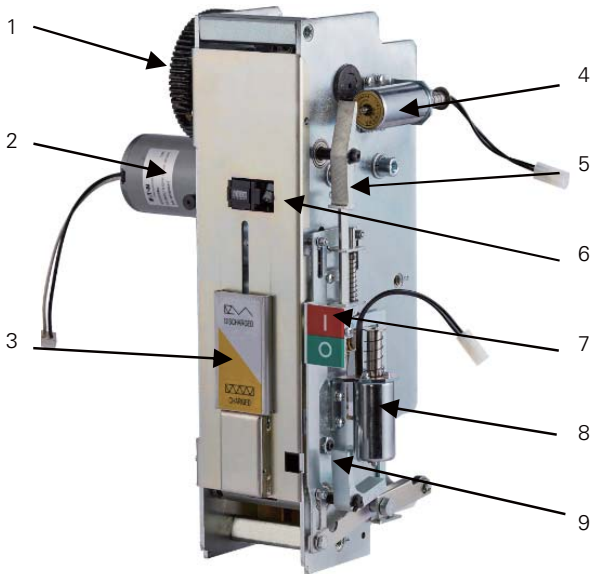

E-Legend Mechanism

- | | |
|---------------------|-------------------------|
| 1. Charging Gear | 6. Operation Counter |
| 2. Charging Motor | 7. Open/Close Indicator |
| 3. Charge Indicator | 8. Opening Coil |
| 4. Closing Coil | 9. Trip Lever |
| 5. Close Lever | |

W-VACi IEC 24 kV

Vacuum circuit breaker

The W-VACi IEC vacuum circuit breakers are available globally in both withdrawable and fixed configurations for maximum flexibility.

The W-VACi portfolio of products is complemented by a full line of breaker accessories for maximum safety and ease

of use. Additionally, Eaton’s global service network provides extensive customer support in all regions of the world.

W-VACi IEC withdrawable



W-VACi IEC fixed



L-Frame

The L-frame is the interface between the circuit breaker and the switchgear in withdrawable configurations. All W-VACi circuit breakers can be packaged with the Eaton L-Frame by panel builders and OEMs. The L-Frame can be used in all end user segments for installation into new or existing switchgear. Its optimized design and robust construction provide a solution that is safe, reliable and easy to use.

Integrating the W-VACi circuit breaker into a switchgear design is simple and cost

effective. The W-VACi L-Frame is designed for fast installation by panel builders and OEMs. It ensures full alignment of the circuit breaker contacts with the L-Frame primary contacts that allow for busbar or cable connections. The independently operated shutters are automatically aligned within the L-Frame, facilitating the smooth operation of the shutter mechanism. The shutters can be locked in the closed position for additional safety when the circuit breaker is withdrawn from the switchgear.

Integral position contacts and interlocking mechanisms within the circuit breaker racking in assembly ensure smooth and easy insertion. The L-Frame and W-VACi designs allow for the L-Frame to be free of low voltage secondary cables and wires. Circuit breaker position contacts within the racking in assembly provide remote indication of “Service” or “Test / Withdrawn” positions. Interlocks prevent the circuit breaker from being inserted or withdrawn unless it is in the “Open” position. An optional interlock on the breaker racking in assembly is available to

provide a door interlock such that the panel door can only be opened with the circuit breaker in the “Test / Withdrawn” position.



L-Frame for withdrawable configurations

W-VACi IEC product portfolio overview

Circuit breaker designation			24 kV	
Rated voltage	U_r	kV	24	
Rated frequency	f_r	Hz	50/60	
Rated normal current	I_r	A	630/800/1250	1600/2000/2500
Rated short-time withstand current	I_k	kA rms	31.5	
Rated duration of short circuit	t_k	s	3	
Rated supply voltage		V	24 - 48 - 60 - 110 - 125 - 220 - 250 VDC / 120 - 220 - 230 VAC	
Pole-center distance		mm	210	275
Upper-to-lower terminal spacing		mm	310	310

Years of innovation and experience deliver industry leading vacuum circuit breaker technology

Eaton has combined global innovation and substantial design investments to deliver a complete IEC vacuum circuit breaker portfolio for all applications.

W-VACi vacuum circuit breakers provide you with;

Environmentally friendly offering

The W-VACi IEC circuit breaker interrupting chamber and pole unit insulation are free of SF₆ gas. The mechanism plating is RoHS compliant. The encapsulated pole unit materials are recyclable.

User friendly operation

The W-VACi circuit breaker controls and position indicators are clearly and functionally grouped on the front of the control panel. They include manual close and trip pushbuttons, closing spring charged/discharged indicator, circuit breaker open/closed indicator and operations counter. All controls are ergonomic for maximum ease of use. The W-VACi circuit breakers are very easy to handle due to low weight and small size.

Automatic alignment with easy circuit breaker insertion

The W-VACi circuit breaker can conveniently be rolled into the switchgear compartment via guide rails which allow automatic alignment of the primary disconnects.

Easy access and minimal inspection

The stored energy mechanism and control components are easily accessible and can be inspected by removing the front panel. The location of the mechanism and control

components on the circuit breaker also ensures easy inspection. Only minimal inspection is required.

Safety, reliability and performance

The W-VACi IEC circuit breakers offer several different safety features. The steel shield behind the UMA and the circuit breaker front cover are earthed and offer double layer isolation from the high voltage components when the circuit breaker is energized in switchgear. The circuit breaker can be connected or disconnected with the compartment door closed by utilizing an integral racking device. The manual racking device requires minimal operator force. The optional integral motor operated racking device allows for the breaker to be racked in remotely, offering an added layer of operator safety.

The mechanically and electrically trip-free stored energy mechanism design ensures that while holding a mechanical trip command, the circuit breaker contacts will not close even when an electrical or mechanical close command is received.

Safety interlocks provide the highest level of protection to operators. If the circuit breaker is closed, it cannot be racked in or out. An optional door interlock mechanism on the circuit breaker can be supplied to ensure that the racking of

the breaker can only happen when the compartment door is closed.

Eaton's world class quality and routine circuit breaker life testing process provide lasting product reliability. The reliability of the vacuum interrupter, encapsulated pole unit and mechanism assemblies ensures that the circuit breaker assembly is of the highest performance standards.

Flexible

The W-VACi circuit breaker offers field customization with a full range of accessories that allow easy and fast installation. It comes with an integral spring charging handle. In addition, it offers a wide selection of optional accessories for additional features and flexibility.


Cost effective

The compact size of W-VACi circuit breakers helps reduce

switchgear footprint to achieve reduced building costs. The reliable and simple design minimizes inspection and life cycle costs. In addition, the W-VACi portfolio offers optimized circuit breaker rating combinations and dimensions. This helps reduce users' inventory levels and makes circuit breaker selection and ordering easy.

Versatile in applications

The W-VACi IEC vacuum circuit breaker serves all end-user segments such as industrial, commercial, utility, mining, marine and offshore. W-VACi circuit breakers can be used in a wide range of applications such as the protection of transformers, capacitor banks, motors, busbar sections and cables. The circuit breakers can be applied in special environment conditions such as high altitude, light shock, vibration and high ambient temperature.

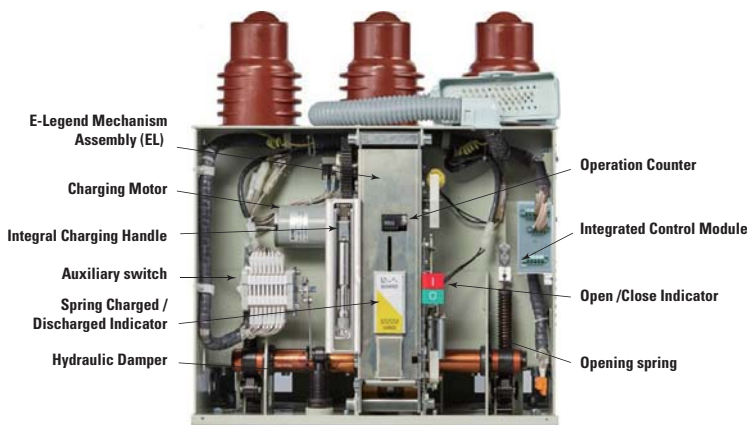


Internal view of W-VACi Circuit Breaker Element

W-VACi circuit breaker accessories



The W-VACi circuit breaker portfolio is complemented by a full line of accessories that fit all breaker sizes. This reduces inventory parts for customers and simplifies the purchasing process.

The W-VACi accessories are easy to mount and wire, minimizing installation time and cost. This feature facilitates accessory changes by the installer or user personnel, eliminating the need for manufacturer modification or outside service companies.

Standard accessories

Shunt opening release (SO1) This device allows for remote opening of the circuit breaker and can operate with both direct and alternating current. Attributes <table><tr><td>Ua (DC)</td><td>24-30-48-60-110-125-220-250 V</td></tr><tr><td>Ua (AC)</td><td>120-220-230-240 V</td></tr><tr><td>Operating limits</td><td>70...110% Ua (DC) 85...110% Ua (AC)</td></tr><tr><td>Opening time</td><td>40 ~ 60 ms</td></tr><tr><td>Insulation voltage</td><td>2000 V, 50 / 60 Hz (for 1 min.)</td></tr></table> 	Ua (DC)	24-30-48-60-110-125-220-250 V	Ua (AC)	120-220-230-240 V	Operating limits	70...110% Ua (DC) 85...110% Ua (AC)	Opening time	40 ~ 60 ms	Insulation voltage	2000 V, 50 / 60 Hz (for 1 min.)	Standard 	Breaker auxiliary contacts (S1) Standard circuit breakers contain a 8NO / 8NC auxiliary switch. 4NO / 4NC contacts are used by the circuit breaker, therefore 4NO / 4NC contacts are available for the end user. Selection Standard Two switches - 10NO / 10NC Attributes IEC Contact Class 1, Rated Continuous Current 10 A, Breaking Capacity 440 W. Power Consumption: DC: 10 A @ 24 V, 6 A @ 48 V, 5 A @ 60 V, 2.9 A @ 110 V, 2.9 A @ 125 V, 1.7 A @ 220 V, 1.7 A @ 250 V AC: 14.5 A @ 120 V, 9.5 A @ 220 V, 9.5 A @ 230 V, 9.5A @ 240V Insulation voltage 2000 V, 50 / 60 Hz (for 1 min.) 	Standard				
Ua (DC)	24-30-48-60-110-125-220-250 V																
Ua (AC)	120-220-230-240 V																
Operating limits	70...110% Ua (DC) 85...110% Ua (AC)																
Opening time	40 ~ 60 ms																
Insulation voltage	2000 V, 50 / 60 Hz (for 1 min.)																
Shunt closing release This device allows for remote closing of the circuit breaker and can operate with both direct and alternating current. Attributes <table><tr><td>Ua (DC)</td><td>24-30-48-60-110-125-220-250 V</td></tr><tr><td>Ua (AC)</td><td>120-220-230-240 V</td></tr><tr><td>Operating limits</td><td>85...110% Ua (AC)</td></tr><tr><td>Closing time</td><td>25 ~ 60 ms</td></tr><tr><td>Insulation voltage</td><td>2000 V, 50 / 60 Hz (for 1 min.)</td></tr></table> 	Ua (DC)	24-30-48-60-110-125-220-250 V	Ua (AC)	120-220-230-240 V	Operating limits	85...110% Ua (AC)	Closing time	25 ~ 60 ms	Insulation voltage	2000 V, 50 / 60 Hz (for 1 min.)	Standard 	Closing spring signaling contacts (LS1) This device is used to signal whether the operating mechanism's closing spring is charged or discharged. It uses a micro-switch that allows remote signaling of the state of the closing spring. State of the contacts <table><tr><td>Open</td><td>Closing spring charged</td></tr><tr><td>Closed</td><td>Closing spring discharged</td></tr></table> Attributes Power Consumption: DC: 4 A @ 24 V, 2.5 A @ 48 V, 2 A @ 60 V, 0.9 A @ 110 V, 0.9 A @ 125 V, 0.4 A @ 220 V, 0.4 A @ 250 V AC: 9.5 A @ 120 V, 5 A @ 220 V, 5 A @ 230 V, 5 A @ 240 V Insulation voltage 2000 V, 50 / 60 Hz (for 1 min.) 	Open	Closing spring charged	Closed	Closing spring discharged	Standard
Ua (DC)	24-30-48-60-110-125-220-250 V																
Ua (AC)	120-220-230-240 V																
Operating limits	85...110% Ua (AC)																
Closing time	25 ~ 60 ms																
Insulation voltage	2000 V, 50 / 60 Hz (for 1 min.)																
Open	Closing spring charged																
Closed	Closing spring discharged																
Spring charging motor This device charges the mechanism's closing spring electrically. In the event of a loss of power, the mechanism's closing spring can be charged manually. Attributes <table><tr><td>Ua (DC)</td><td>24-30-48-60-110-125-220-250 V</td></tr><tr><td>Ua (AC)</td><td>120-220-230-240 V</td></tr><tr><td>Operating limits</td><td>Circuit breaker opening: 85...110% Ua</td></tr><tr><td>Insulation voltage</td><td>2000 V, 50 / 60 Hz (for 1 min.)</td></tr></table> 	Ua (DC)	24-30-48-60-110-125-220-250 V	Ua (AC)	120-220-230-240 V	Operating limits	Circuit breaker opening: 85...110% Ua	Insulation voltage	2000 V, 50 / 60 Hz (for 1 min.)	Standard	Position contacts (S8 & S9) Standard for withdrawable Fitted in the racking assembly, these contacts are used to identify if the circuit breaker is in the service, test, or disconnected position. This device also acts as an electrical interlock to prevent unsafe operations. Attributes IEC Contact Class 1, Rated Continuous Current 10 A, Breaking Capacity 440 W. Insulation voltage 2000 V, 50 / 60 Hz (for 1 min.) 	Standard for withdrawable						
Ua (DC)	24-30-48-60-110-125-220-250 V																
Ua (AC)	120-220-230-240 V																
Operating limits	Circuit breaker opening: 85...110% Ua																
Insulation voltage	2000 V, 50 / 60 Hz (for 1 min.)																
Racking handle This device is used to manually rack the circuit breaker into the switchgear. One unit of this device can be used for all of the circuit breakers on a particular site. 	Standard for withdrawable																

Optional accessories

Second shunt opening release (SO2) Like the shunt opening release (SO1), this device allows for local or remote opening of the circuit breaker. It can be supplied by a circuit completely independent from the shunt opening release # 1 (SO1). This device can operate with direct and alternating current.	Optional	Undervoltage release (UVR) This device opens the circuit breaker when there is notable lowering or loss of its power supply. It can operate with both direct and alternating current.	Optional
Attributes Ua (DC) 24-30-48-60-110-125-220-250 V Ua (AC) 120-220-230-240 V Operating limits 70...110% Ua (DC) 85...110% Ua (AC) Opening time 40 ~ 60 ms Insulation voltage 2000 V, 50 / 60 Hz (for 1 min.)		Attributes Ua (DC) 24-30-48-60-110-125-220-250 V Ua (AC) 120-220-230-240 V Operating limits 35-0% Ua: UVR operates, circuit breaker opens 70-110% Ua: UVR does not operate Insulation voltage 2000 V, 50 / 60 Hz (for 1 min.)	
Mechanism electromagnetic interlock (IC1) This device protects the operating mechanism from being unsafely activated in the event that the control circuit is not energized.	Optional	Fixed circuit breaker interlock This mechanical device is used to prevent mis-closing of the circuit breaker by discharging the closing spring when racking the breaker in or out. It is used on fixed circuit breakers that are converted to draw-out circuit breakers by the customer.	Optional
Attributes Ua (DC) 24-30-48-60-110-125-220-250 V Ua (AC) 120-220-230-240 V Operating limits 85...110% Ua Continuous Power (Pc) DC = 5 W AC = 5 VA Insulation voltage 2000 V, 50 / 60 Hz (for 1 min.)			

Technical Data 24 kV

Item		Unit	24kV W-VAC i					
Voltage (Ur)		kV	24			24		24
Normal Current(Ir)		A	630	800	1250	1600	2000	2500
Short-Time Withstand Current(Ik)		kA	31.5	31.5	31.5	31.5	31.5	31.5
Short Circuit Breaking Current(Isc)		kA	31.5	31.5	31.5	31.5	31.5	31.5
Duration of Short Circuit(tk)		sec	3	3	3	3	3	3
Frequency(fr)		Hz	50/60	50/60	50/60	50/60	50/60	50/60
Short circuit Making Current(Ima)		kA	80/82	80/82	80/82	80/82	80/82	80/82
Contact Closing Bounce Time		ms	≤2	≤2	≤2	≤2	≤2	≤2
Time Difference of Three Pole Opening and Closing		ms	≤2	≤2	≤2	≤2	≤2	≤2
Fixed Resistance ^①		μΩ	≤25	≤25	≤25	≤20	≤20	≤20
DO Resistance ^①		μΩ	≤40	≤40	≤40	≤30	≤30	≤30
Closing Time		ms	25~50	25~50	25~50	25~50	25~50	25~50
Opening Time		ms	40~60	40~60	40~60	40~60	40~60	40~60
Closing Speed ^①		m/s	0.9~1.3	0.9~1.3	0.9~1.3	0.9~1.3	0.9~1.3	0.9~1.3
Opening Speed ^①		m/s	1.3~1.95	1.3~1.95	1.3~1.95	1.3~1.95	1.3~1.95	1.3~195
D.C. Component of Breaking Current(Idc)		%	40	40	40	40	40	40
Cable-Charging Breaking Current (C2)		A	31.5	31.5	31.5	31.5	31.5	31.5
Single Capacitor Bank Breaking Current (C2)		A	400	400	400	-	-	-
Back to Back Capacitor Bank Breaking Current (C2)		A	400	400	400	-	-	-
Out-of-Phase Breaking Current		kA	7.9	7.9	7.9	7.9	7.9	7.9
Pole to Pole Spacing (Center to Center)		mm	210	210	210	275	275	275
Upper to Lower Terminal Spacing		mm	310	310	310	310	310	310
Mechanical Endurance		Cycle	10k	10k	10k	10k	10k	10k
Electrical Endurance		Cycle	10k	10k	10k	10k	10k	10k
Rated Insulation Level	Rated Power Frequency Withstand Voltage(Ud)	kV	50	50	50	50	50	50
	Rated Lighting Impulse Withstand Voltage(U _p)	kV	125	125	125	125	125	125
Operating Sequence		O-0.3s-CO-15s-CO						
Classification		E2-M2-S1						


①: Testing configurations available upon request

W-VACi Dimensions


Withdrawable

24 kV


Front




Front




Front




Side




Side




Side




Plan



Plan



Plan




Note:
Not all breaker configurations shown. For detailed drawings of all available breaker sizes, please contact your Eaton representative.


Fixed

24 kV


Front




Front




Front




Side




Side




Side




Plan



Plan



Plan



Note:
Not all breaker configurations shown. For detailed drawings of all available breaker sizes, please contact your Eaton representative.

Eaton's Electrical Sector is a global leader in power distribution, power quality, control and automation, and monitoring products. When combined with Eaton's full-scale engineering services, these products provide customer-driven PowerChain™ solutions to serve the power system needs of the data center, industrial, institutional, public sector, utility, commercial, residential, IT, mission critical, alternative energy and OEM markets worldwide.

PowerChain™ solutions help enterprises achieve sustainable and competitive advantages through proactive management of the power system as a strategic, integrated asset throughout its life cycle, resulting in enhanced safety, greater reliability and energy efficiency. For more information, visit www.eaton.com/electrical

Europe, Middle East and Africa

Eaton Industries (Netherlands) B.V.
P.O. Box 23
7550 AA Hengelo
The Netherlands
Tel.: +31 74 246 4012
Fax: +31 74 246 4601
info.electric@eaton.com
www.eaton.eu

South America

Eaton Ltda.
Av. Pierre Simon de Laplace, 751
Cond. Techno Park – Via Anhanguera,
Km 104,5
Campinas - SP - 13069-320 - Brasil
Tel.: +55 19 2117 0000
eatonelctricalbrasil@eaton.com
www.eaton.com.br

Asia Pacific

Eaton Electrical Sector Asia Pacific
Headquarters
No.3 Lane 280 Linhong Road
Changning District
Shanghai 200335, P.R.China
Tel.: +86 21 5200 0099
Fax: +86 21 5200 0200
PDSSCustomerInquiry@eaton.com
www.eatonelectrical.com.cn

North America

Eaton Corporation
Electrical Sector
1000 Cherrington Parkway
Moon Township, PA 15108
United States
877-ETN-CARE (877-386-2273)
www.eaton.com